


# AT 101

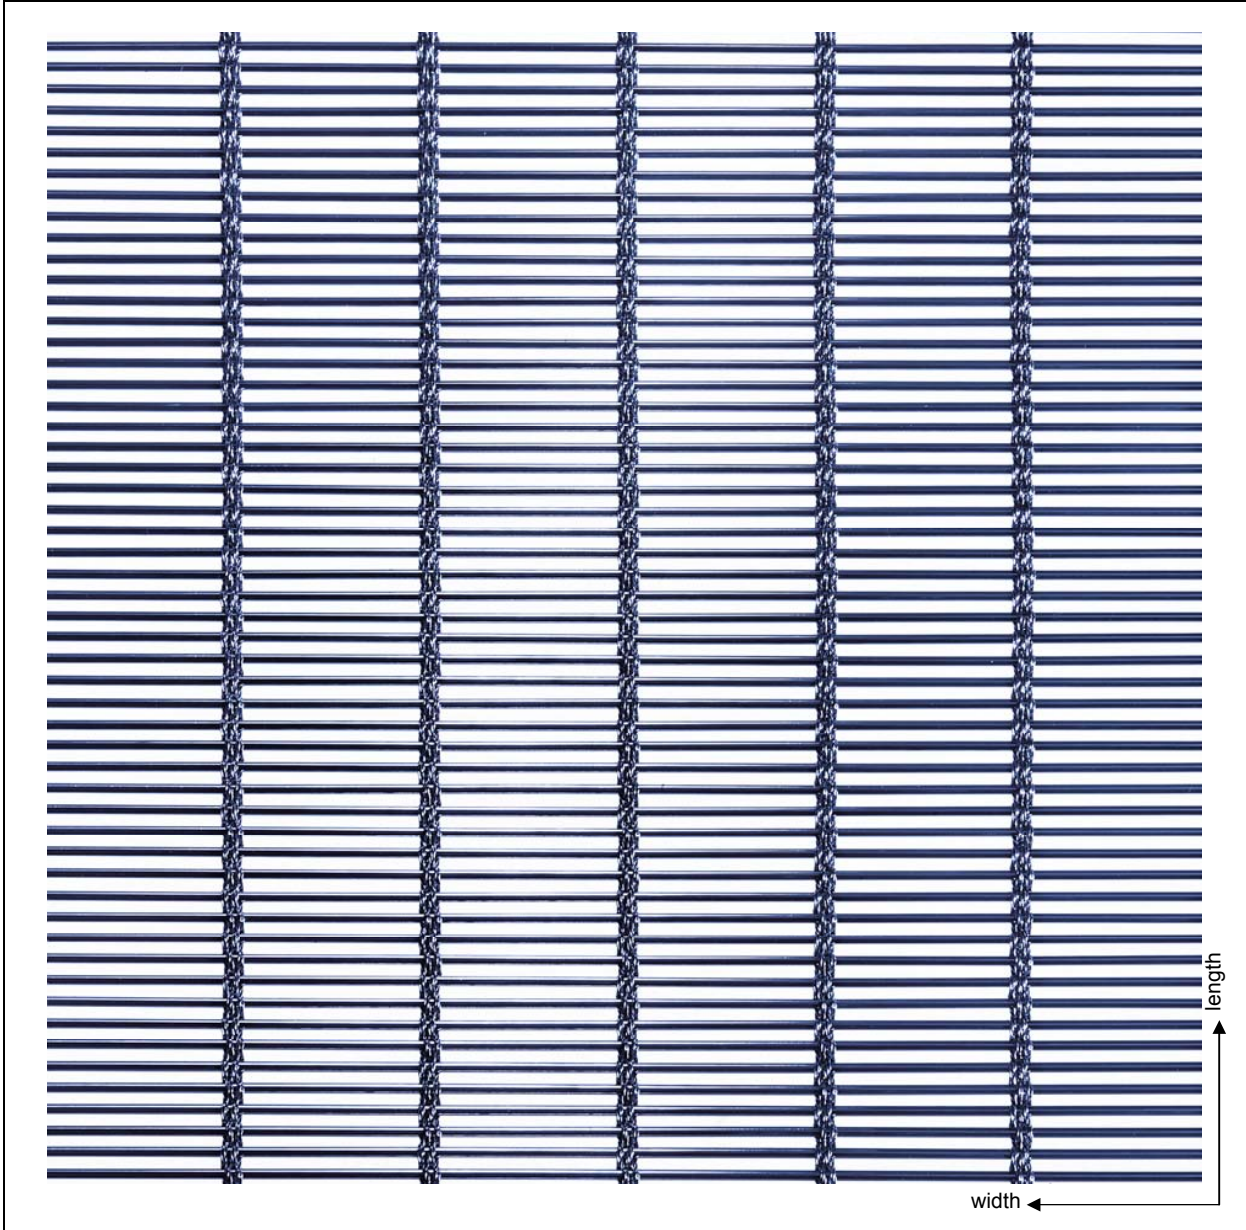

type of mesh	aperture (mm)	wire diameter (mm)	weight (kg/m <sup>2</sup> )	open area (%)	width max. (m)
<b>Multibarrette</b>	<b>25 x 1.5</b>	<b>4 x 0.75 / 1.5</b>	<b>5.2</b>	<b>45</b>	<b>3.0</b>
<b>application</b>			<b>type of mounting</b>		
<ul style="list-style-type: none"> <li>• trade fair exhibition</li> <li>• claddings</li> <li>• retractable sun protection</li> <li>• ceilings and partitions</li> </ul>			<ul style="list-style-type: none"> <li>• slotted tube</li> <li>• angled framing</li> </ul>		