


**AT 20**

**B**

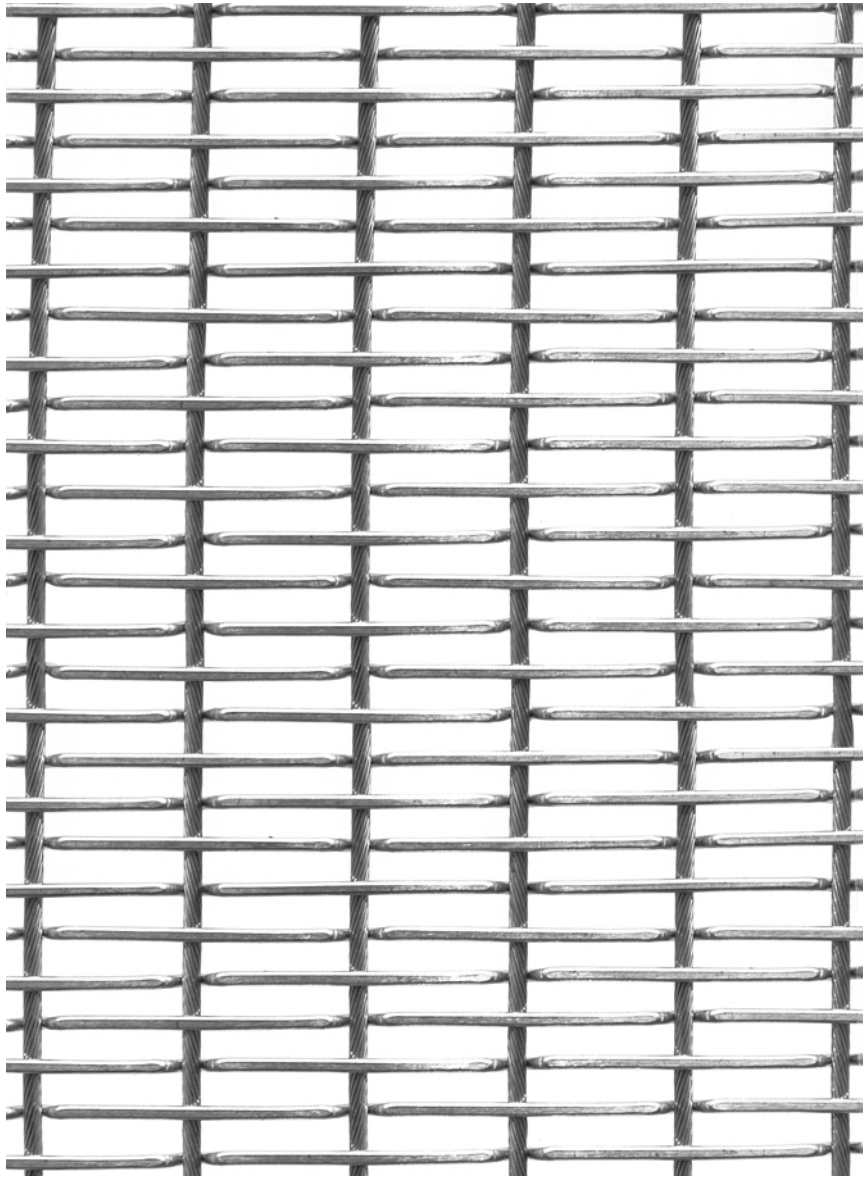

type of mesh	aperture (mm)	wire diameter (mm)	weight (kg/m <sup>2</sup> )	open area (%)	width max. (m)
<b>Cable-Flex</b>	<b>15 x 3.5</b>	<b>1.5 / 2</b>	<b>4.4</b>	<b>57</b>	<b>3.0</b>
<b>application</b>			<b>mounting</b>		
<ul style="list-style-type: none"> <li>• exterior + interior</li> <li>• claddings</li> <li>• partitions</li> </ul>			<ul style="list-style-type: none"> <li>• slotted tube</li> <li>• framing</li> </ul>		