


# LT 51

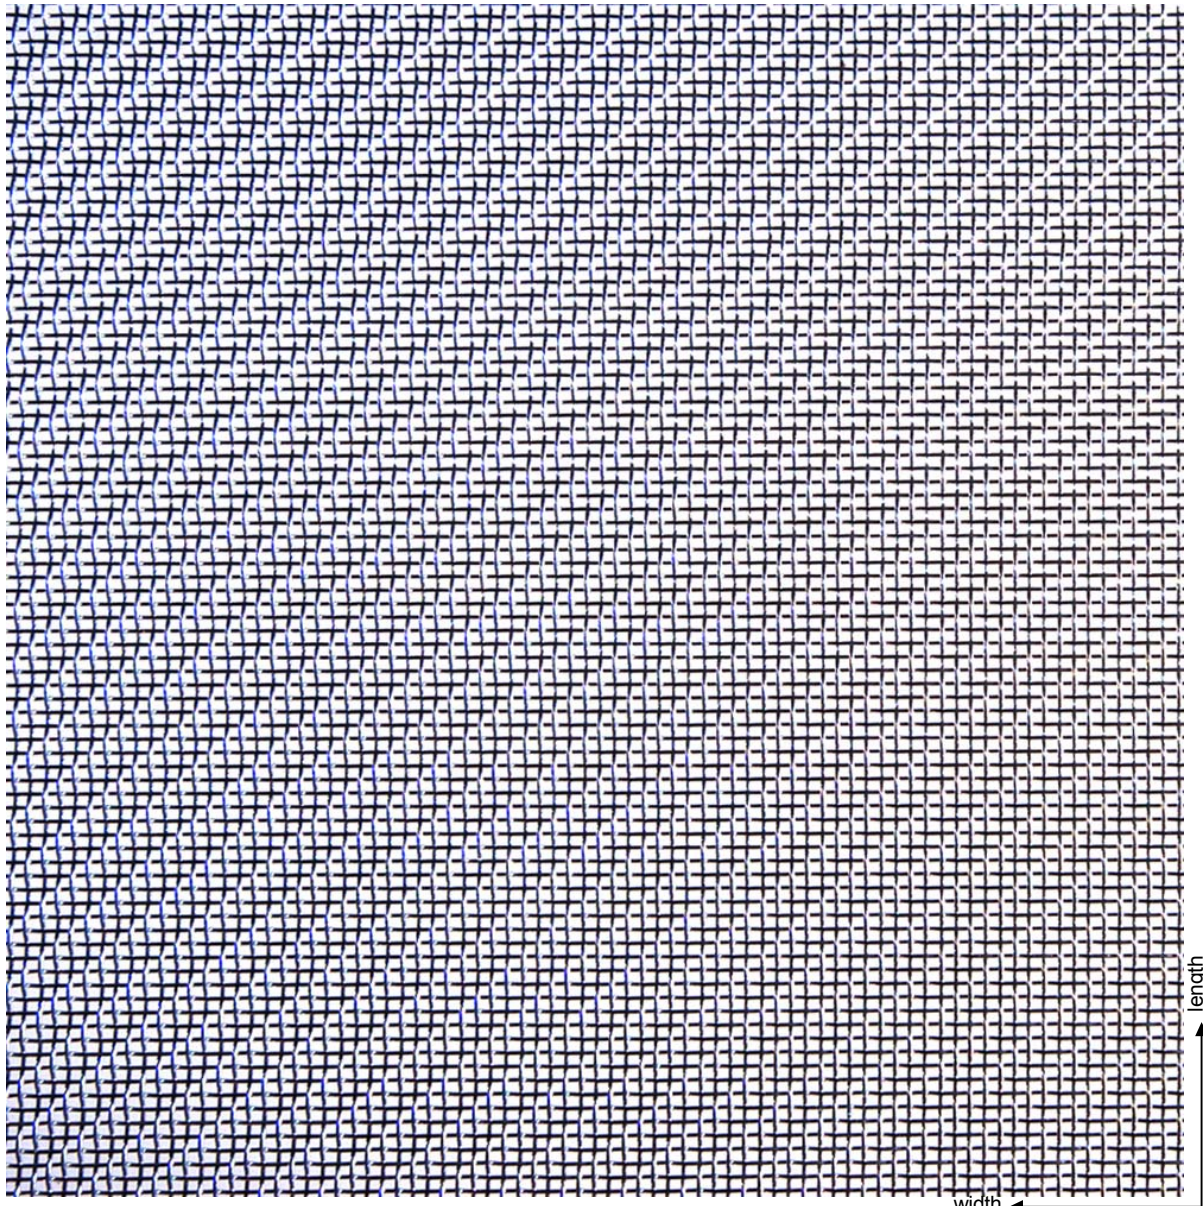

type of mesh	aperture (mm)	wire diameter (mm)	weight (kg/m <sup>2</sup> )	open area (%)	width max. (m)
<b>New Secura</b>	<b>1.4 x 1.4</b>	<b>0.71</b>	<b>3.0</b>	<b>44</b>	<b>1.50</b>
<b>application</b>			<b>type of mounting</b>		
<ul style="list-style-type: none"> <li>• security windows and doors</li> <li>• wall claddings</li> <li>• coffered ceilings</li> </ul>			<ul style="list-style-type: none"> <li>• tensioning selvedge</li> <li>• glue framing</li> <li>• slotted tube</li> <li>• angled framing</li> </ul>		